


# Řemenice - HTD 8M

## Standardní program P

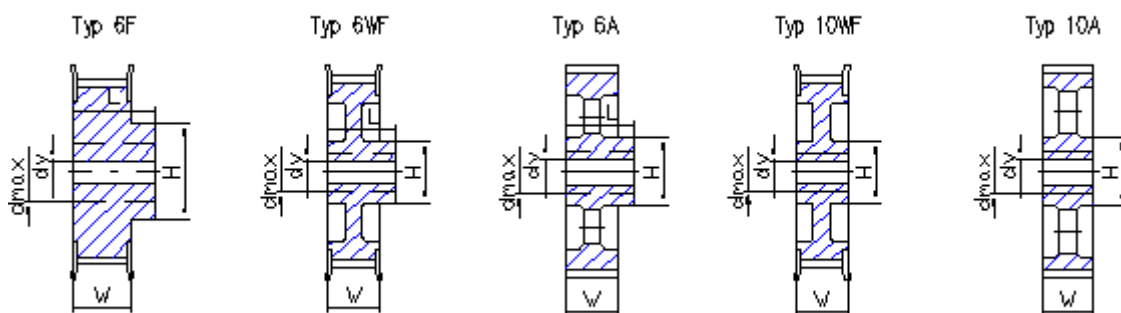

Počet zubů - označení	Hlavový průměr ozubení	Vnější průměr čel	Provedení	H	W	L	Předvrtání dv	Max. konečný otvor d	Hmotnost kg
-----------------------	------------------------	-------------------	-----------	---	---	---	---------------	----------------------	-------------

HTD 8M-20 pro řemeny šířky 20 mm. Materiál: do P38-8M ocel, od P40-8M litina.

<b>P22-8M-20</b>	54,65	60,0	6F	43	28	38	12	25	0,54
<b>P24-8M-20</b>	59,75	66,0	6F	45	28	38	12	28	0,65
<b>P26-8M-20</b>	64,84	71,0	6F	50	28	38	12	30	0,80
<b>P28-8M-20</b>	70,08	75,0	6F	50	28	38	15	30	0,87
<b>P30-8M-20</b>	75,13	83,0	6F	55	28	38	15	32	1,02
<b>P32-8M-20</b>	80,16	87,0	6F	60	28	38	15	35	1,20
<b>P34-8M-20</b>	85,22	91,0	6F	70	28	38	15	42	1,40
<b>P36-8M-20</b>	90,30	98,5	6F	70	28	38	15	42	1,55
<b>P38-8M-20</b>	95,39	103,0	6F	75	28	38	15	45	1,65
<b>P40-8M-20</b>	100,49	106,0	6F	75	28	38	15	45	1,74
<b>P44-8M-20</b>	110,67	119,0	6F	75	28	38	15	45	2,10
<b>P48-8M-20</b>	120,86	127,0	6F	75	28	38	15	45	2,44
<b>P56-8M-20</b>	141,23	148,0	6WF	80	28	38	15	45	2,60
<b>P64-8M-20</b>	161,60	168,0	6WF	80	28	38	15	45	2,90
<b>P72-8M-20</b>	181,97	192,0	6WF	80	28	38	15	45	3,10
<b>P80-8M-20</b>	202,35		6A	90	28	38	15	50	3,80
<b>P 90-8M-20</b>	227,81		6A	90	28	38	15	50	4,20
<b>P112-8M-20</b>	283,83		6A	90	28	38	18	50	5,20
<b>P144-8M-20</b>	365,32		6A	90	28	38	20	50	7,50
<b>P168-8M-20</b>	426,44		6A	100	28	38	20	60	10,00
<b>P192-8M-20</b>	487,55		6A	100	28	38	20	60	14,40

HTD 8M-30 pro řemeny šířky 30 mm. Materiál: do P38-8M ocel, od P40-8M litina.

<b>P22-8M-30</b>	54,65	60,0	6F	43	38	48	12	25	0,69
<b>P24-8M-30</b>	59,75	66,0	6F	45	38	48	12	28	0,84
<b>P26-8M-30</b>	64,84	71,0	6F	50	38	48	12	30	1,00
<b>P28-8M-30</b>	70,08	75,0	6F	50	38	48	15	30	1,12
<b>P30-8M-30</b>	75,13	83,0	6F	55	38	48	15	32	1,32
<b>P32-8M-30</b>	80,16	87,0	6F	60	38	48	15	35	1,53
<b>P34-8M-30</b>	85,22	91,0	6F	70	38	48	15	42	1,80
<b>P36-8M-30</b>	90,30	98,5	6F	70	38	48	15	42	1,99
<b>P38-8M-30</b>	95,39	103,0	6F	75	38	48	15	45	2,27
<b>P40-8M-30</b>	100,49	106,0	6F	75	38	48	15	45	2,40
<b>P44-8M-30</b>	110,67	119,0	6F	75	38	48	15	45	2,80
<b>P48-8M-30</b>	120,86	127,0	6F	75	38	48	15	45	3,20
<b>P56-8M-30</b>	141,23	148,0	6WF	90	38	48	15	50	3,60
<b>P64-8M-30</b>	161,60	168,0	6WF	90	38	48	15	50	4,30
<b>P72-8M-30</b>	181,97	192,0	6WF	95	38	48	15	55	4,80
<b>P80-8M-30</b>	202,35		6A	100	38	48	15	60	5,10
<b>P90-8M-30</b>	227,81		6A	100	38	48	15	60	5,70
<b>P112-8M-30</b>	283,83		6A	100	38	48	18	60	6,80
<b>P144-8M-30</b>	365,32		6A	100	38	48	20	60	9,30
<b>P168-8M-30</b>	426,44		6A	100	38	48	20	60	11,40
<b>P192-8M-30</b>	487,55		6A	100	38	48	20	60	16,00

HTD 8M-50 pro řemeny šířky 50 mm. Materiál: do P38-8M ocel, od P40-8M litina.

<b>P22-8M-50</b>	54,65	60,0	6F	43	60	70	12	28	1,00
<b>P24-8M-50</b>	59,75	66,0	6F	45	60	70	12	28	1,23
<b>P26-8M-50</b>	64,84	71,0	6F	50	60	70	12	30	1,50
<b>P28-8M-50</b>	70,08	75,0	6F	50	60	70	15	30	1,67
<b>P30-8M-50</b>	75,13	83,0	6F	55	60	70	15	32	1,97
<b>P32-8M-50</b>	80,16	87,0	6F	60	60	70	15	35	2,27
<b>P34-8M-50</b>	85,22	91,0	6F	70	60	70	15	42	2,69
<b>P36-8M-50</b>	90,30	98,5	6F	70	60	70	15	42	2,97
<b>P38-8M-50</b>	95,39	103,0	6F	75	60	70	15	45	3,23
<b>P40-8M-50</b>	100,49	106,0	6F	75	60	70	18	45	3,50
<b>P44-8M-50</b>	110,67	119,0	6F	75	60	70	18	45	3,90
<b>P48-8M-50</b>	120,86	127,0	6F	80	60	70	18	45	4,30
<b>P56-8M-50</b>	141,23	148,0	10WF	90	60	60	18	50	5,00
<b>P64-8M-50</b>	161,60	168,0	10WF	100	60	60	18	60	5,60
<b>P72-8M-50</b>	181,97	192,0	10WF	100	60	60	18	60	6,80
<b>P80-8M-50</b>	202,35		10A	110	60	60	18	65	6,90
<b>P90-8M-50</b>	227,81		10A	110	60	60	18	65	8,60
<b>P112-8M-50</b>	283,83		10A	110	60	60	18	65	9,60
<b>P144-8M-50</b>	365,32		10A	110	60	60	20	65	13,80
<b>P168-8M-50</b>	426,44		10A	120	60	60	20	70	16,00
<b>P192-8M-50</b>	487,55		10A	130	60	60	20	70	22,40

HTD 8M-85 pro řemeny šířky 85 mm. Materiál: do P38-8M ocel, od P40-8M litina.

<b>P22-8M-85</b>	54,65	60,0	6F	43	95	105	12	28	1,55
<b>P24-8M-85</b>	59,75	66,0	6F	45	95	105	12	30	1,90
<b>P26-8M-85</b>	64,84	71,0	6F	50	95	105	12	32	2,25
<b>P28-8M-85</b>	70,08	75,0	6F	50	95	105	15	32	2,55
<b>P30-8M-85</b>	75,13	83,0	6F	55	95	105	15	32	3,00
<b>P32-8M-85</b>	80,16	87,0	6F	60	95	105	15	35	3,57
<b>P34-8M-85</b>	85,22	91,0	6F	70	95	105	15	42	4,00
<b>P36-8M-85</b>	90,30	98,5	6F	70	95	105	15	42	4,50
<b>P38-8M-85</b>	95,39	103,0	6F	75	95	105	15	45	4,90
<b>P40-8M-85</b>	100,49	106,0	6F	75	95	105	18	45	5,20
<b>P44-8M-85</b>	110,67	119,0	6F	75	95	105	18	45	6,60
<b>P48-8M-85</b>	120,86	127,0	6F	80	95	105	18	45	7,60
<b>P56-8M-85</b>	141,23	148,0	6F	80	95	105	20	45	9,80
<b>P64-8M-85</b>	161,60	168,0	10WF	100	95	95	20	60	10,40
<b>P72-8M-85</b>	181,97	192,0	10WF	110	95	95	20	65	11,40
<b>P80-8M-85</b>	202,35		10A	110	95	95	20	65	11,10
<b>P90-8M-85</b>	227,81		10A	110	95	95	20	65	13,20
<b>P112-8M-85</b>	283,83		10A	110	95	95	24	65	16,30
<b>P144-8M-85</b>	365,32		10A	120	95	95	24	70	21,50
<b>P168-8M-85</b>	426,44		10A	120	95	95	24	70	26,10
<b>P192-8M-85</b>	487,55		10A	130	95	95	24	70	30,60