


Řemenice - HTD 5M

Standardní program P

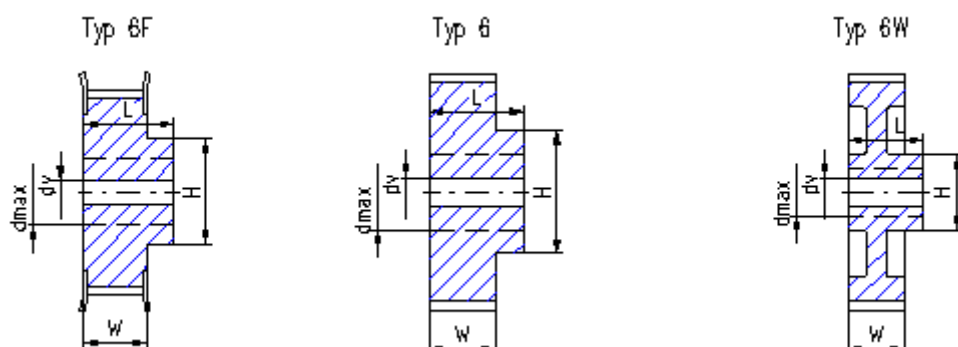

Počet zubů - označení	Hlavový průměr ozubení	Vnější průměr čel	Provedení	H	W	L	Předvrtání dv	Max. konečný otvor d	Hmotnost kg
-----------------------	------------------------	-------------------	-----------	---	---	---	---------------	----------------------	-------------

HTD 5M-9 pro řemeny šířky 9 mm. Materiál: do P40-5M ocel, od P44-5M hliník.

P12-5M-09	17,96	23,0	6F	13,0	14,5	20,0	4	8,0	0,028
P14-5M-09	21,14	25,0	6F	14,0	14,5	20,0	6	9,0	0,034
P15-5M-09	22,73	28,0	6F	16,0	14,5	20,0	6	10,0	0,042
P16-5M-09	24,32	28,0	6F	16,5	14,5	20,0	6	10,5	0,050
P18-5M-09	27,51	32,0	6F	20,0	14,5	20,0	6	12,5	0,070
P20-5M-09	30,69	36,0	6F	23,0	14,5	22,5	6	13,5	0,094
P21-5M-09	32,28	38,0	6F	24,0	14,5	22,5	6	14,0	0,110
P22-5M-09	33,87	38,0	6F	25,5	14,5	22,5	6	15,0	0,118
P24-5M-09	37,06	42,0	6F	27,0	14,5	22,5	6	16,0	0,145
P26-5M-09	40,24	44,0	6F	30,0	14,5	22,5	6	18,0	0,170
P28-5M-09	43,42	48,0	6F	30,5	14,5	22,5	6	18,0	0,200
P30-5M-09	46,60	51,0	6F	35,0	14,5	22,5	6	21,0	0,236
P32-5M-09	49,79	54,0	6F	38,0	14,5	22,5	8	23,0	0,270
P36-5M-09	56,16	60,0	6F	38,0	14,5	22,5	8	23,0	0,324
P40-5M-09	62,52	71,0	6F	38,0	14,5	22,5	8	23,0	0,400
P44-5M-09	68,89		6W	38,0	14,5	25,5	8	23,0	0,170
P48-5M-09	75,25		6W	45,0	14,5	25,5	8	28,0	0,182
P60-5M-09	94,35		6W	45,0	14,5	25,5	8	28,0	0,230
P72-5M-09	113,45		6W	45,0	14,5	25,5	8	28,0	0,270

HTD 5M-15 pro řemeny šířky 15 mm. Materiál: do P40-5M ocel, od P44-5M hliník.

P12-5M-15	17,96	23,0	6F	13,0	20,5	26	4	8,0	0,034
P14-5M-15	21,14	25,0	6F	14,0	20,5	26	6	9,0	0,046
P15-5M-15	22,73	28,0	6F	16,0	20,5	26	6	10,0	0,056
P16-5M-15	24,32	28,0	6F	16,5	20,5	26	6	10,5	0,064
P18-5M-15	27,51	32,0	6F	20,0	20,5	26	6	12,5	0,086
P20-5M-15	30,69	36,0	6F	23,0	20,5	26	6	13,5	0,112
P21-5M-15	32,28	38,0	6F	24,0	20,5	26	6	14,0	0,130
P22-5M-15	33,87	38,0	6F	25,5	20,5	26	6	15,0	0,140
P24-5M-15	37,06	42,0	6F	27,0	20,5	28	6	16,0	0,180
P26-5M-15	40,24	44,0	6F	30,0	20,5	28	6	18,0	0,220
P28-5M-15	43,42	48,0	6F	30,5	20,5	28	6	18,0	0,250
P30-5M-15	46,60	51,0	6F	35,0	20,5	28	6	21,0	0,300
P32-5M-15	49,79	54,0	6F	38,0	20,5	28	8	23,0	0,350
P36-5M-15	56,16	60,0	6F	38,0	20,5	28	8	23,0	0,426
P40-5M-15	62,52	71,0	6F	38,0	20,5	28	8	23,0	0,520
P44-5M-15	68,89		6V	38,0	20,5	30	8	23,0	0,225
P48-5M-15	75,25		6V	38,0	20,5	30	8	23,0	0,187
P60-5M-15	94,35		6V	50,0	20,5	30	8	30,0	0,305
P72-5M-15	113,45		6V	50,0	20,5	30	8	30,0	0,375

HTD 5M-25 pro řemeny šířky 25 mm. Materiál: do P40-5M ocel, od P44-5M hliník.

P12-5M-25	17,96	23,0	6F	13,0	30	36	4	8,0	0,050
P14-5M-25	21,14	25,0	6F	14,0	30	36	6	9,0	0,070
P15-5M-25	22,73	28,0	6F	16,0	30	36	6	10,0	0,080
P16-5M-25	24,32	28,0	6F	16,5	30	36	6	10,5	0,100
P18-5M-25	27,51	32,0	6F	20,0	30	36	6	12,5	0,120
P20-5M-25	30,69	36,0	6F	23,0	30	36	6	13,5	0,160
P21-5M-25	32,28	38,0	6F	24,0	30	38	6	14,0	0,190
P22-5M-25	33,87	38,0	6F	25,5	30	38	6	15,0	0,210
P24-5M-25	37,06	42,0	6F	27,0	30	38	6	16,0	0,250
P26-5M-25	40,24	44,0	6F	30,0	30	38	6	18,0	0,300
P28-5M-25	43,42	48,0	6F	30,5	30	38	6	18,0	0,350
P30-5M-25	46,60	51,0	6F	35,0	30	38	6	21,0	0,420
P32-5M-25	49,79	54,0	6F	38,0	30	38	8	23,0	0,480
P36-5M-25	56,16	60,0	6F	38,0	30	38	8	23,0	0,590
P40-5M-25	62,52	71,0	6F	38,0	30	38	8	23,0	0,740
P44-5M-25	68,89		6	38,0	30	40	8	23,0	0,320
P48-5M-25	75,25		6V	38,0	30	40	8	23,0	0,275
P60-5M-25	94,35		6V	50,0	30	40	8	30,0	0,435
P72-5M-25	113,45		6V	50,0	30	40	8	30,0	0,525