


Řemenice - HTD 8M

Standardní program PL

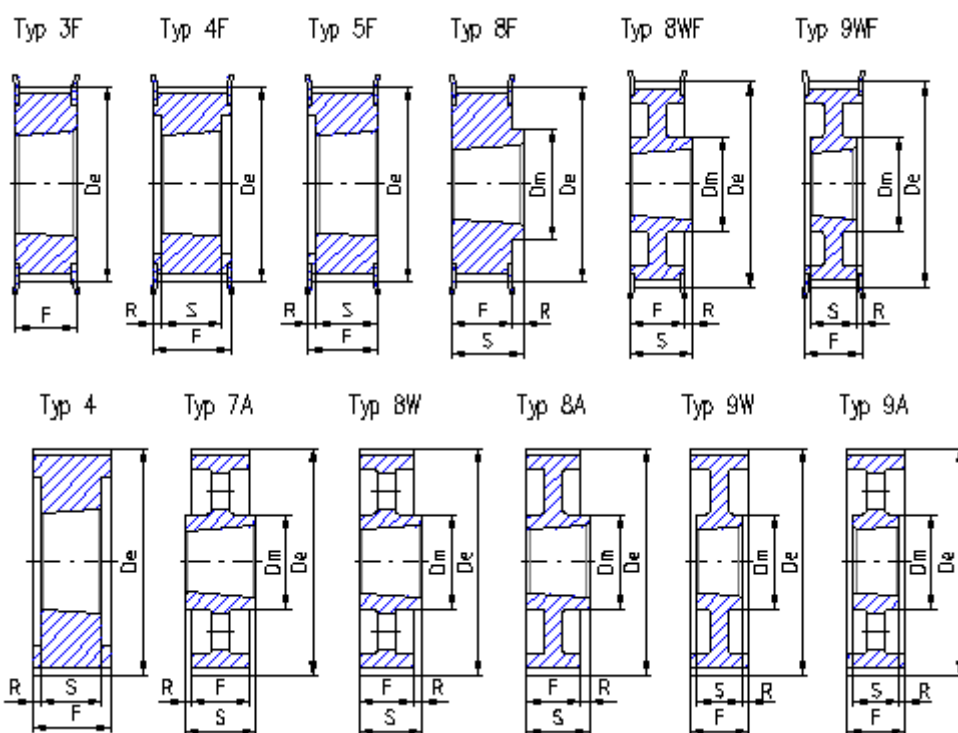

Počet zubů - označení	Hlavový průměr ozubení	Vnější průměr čel	Typ	Vložka	Max. průměr hřídele	Dm	F	S	R	Hmotnost kg
-----------------------	------------------------	-------------------	-----	--------	---------------------	----	---	---	---	-------------

HTD 8M-20 pro řemeny šířky 20 mm. Materiál: šedá litina.

PL22-8M-20	54,65	60,0	5F	1008	25		28	22	6	0,24
PL24-8M-20	59,75	66,0	5F	1108	28		28	22	6	0,30
PL26-8M-20	64,84	71,0	5F	1108	28		28	22	6	0,36
PL28-8M-20	70,08	75,0	5F	1108	28		28	22	6	0,44
PL30-8M-20	75,13	83,0	5F	1108	28		28	22	6	0,53
PL32-8M-20	80,16	87,0	5F	1610	42		28	25	3	0,42
PL34-8M-20	85,22	91,0	5F	1610	42		28	25	3	0,55
PL36-8M-20	90,30	98,5	5F	1610	42		28	25	3	0,68
PL38-8M-20	95,39	103,0	5F	1610	42		28	25	3	0,80
PL40-8M-20	100,49	106,0	5F	1610	42		28	25	3	1,00
PL44-8M-20	110,67	119,0	8F	2012	50	93	28	32	4	1,20
PL48-8M-20	120,86	127,0	8F	2012	50	96	28	32	4	1,60
PL56-8M-20	141,23	148,0	8F	2012	50	110	28	32	4	2,40
PL64-8M-20	161,60	168,0	8WF	2012	50	110	28	32	4	2,70
PL72-8M-20	181,97	192,0	8WF	2012	50	110	28	32	4	3,30
PL80-8M-20	202,35		8WV	2012	50	110	28	32	4	3,50
PL90-8M-20	227,81		8A	2012	50	110	28	32	4	3,65

HTD 8M-30 pro řemeny šířky 30 mm. Materiál: šedá litina.

PL22-8M-30	54,65	60,0	5F	1008	25		38	22	16	0,29
PL24-8M-30	59,75	66,0	5F	1108	25		38	22	16	0,38
PL26-8M-30	64,84	71,0	5F	1108	25		38	22	16	0,45
PL28-8M-30	70,08	75,0	5F	1210	32		38	25	13	0,50
PL30-8M-30	75,13	83,0	3F	1615	42		38	38		0,55
PL32-8M-30	80,16	87,0	3F	1615	42		38	38		0,59
PL34-8M-30	85,22	91,0	3F	1615	42		38	38		0,77
PL36-8M-30	90,30	98,5	3F	1615	42		38	38		0,96
PL38-8M-30	95,39	103,0	3F	1615	42		38	38		1,15
PL40-8M-30	100,49	106,0	3F	1615	42		38	38		1,34
PL44-8M-30	110,67	119,0	4F	2012	50		38	32	3	1,33
PL48-8M-30	120,86	127,0	4F	2012	50		38	32	3	1,78
PL56-8M-30	141,23	148,0	4F	2012	50		38	32	3	3,76
PL64-8M-30	161,60	168,0	8F	2517	60	125	38	45	7	4,20
PL72-8M-30	181,97	192,0	8VF	2517	60	125	38	45	7	4,30
PL80-8M-30	202,35		8V	2517	60	125	38	45	7	4,60
PL90-8M-30	227,81		8A	2517	60	125	38	45	7	5,00
PL112-8M-30	283,83		8A	2517	60	125	38	45	7	6,20
PL144-8M-30	365,32		8A	2517	60	125	38	45	7	9,00

HTD 8M-50 pro řemeny šířky 50 mm. Materiál: šedá litina.

PL28-8M-50	70,08	75,0	5F	1210	32		60	25	35	0,60
PL30-8M-50	75,13	83,0	5F	1615	42		60	38	22	0,65
PL32-8M-50	80,16	87,0	5F	1615	42		60	38	22	0,82
PL34-8M-50	85,22	91,0	5F	1615	42		60	38	22	1,06
PL36-8M-50	90,30	98,5	5F	1615	42		60	38	22	1,30
PL38-8M-50	95,39	103,0	5F	1615	42		60	38	22	1,60
PL40-8M-50	100,49	106,0	4F	2012	50		60	32	14	1,71
PL44-8M-50	110,67	119,0	4F	2012	50		60	32	14	1,78
PL48-8M-50	120,86	127,0	4F	2012	50		60	32	14	2,30
PL56-8M-50	141,23	148,0	4F	2517	60		60	45	7,5	3,40
PL64-8M-50	161,60	168,0	4F	2517	60		60	45	7,5	5,00
PL72-8M-50	181,97	192,0	9VF	2517	60	125	60	45	7,5	6,70
PL80-8M-50	202,35		4	3020	75		60	51	4,5	8,80
PL90-8M-50	227,81		9V	3020	75	170	60	51	4,5	10,00
PL112-8M-50	283,83		9V	3020	75	170	60	51	4,5	12,00
PL144-8M-50	365,32		9A	3020	75	170	60	51	4,5	15,20
PL168-8M-50	426,44		7A	3525	90	190	60	65	2,5	16,40
PL192-8M-50	487,55		7A	3525	90	190	60	65	2,5	21,80

HTD 8M-85 pro řemeny šířky 85 mm. Materiál: šedá litina.

PL34-8M-85	85,22	91,0	4F	1615	42		95	38	28,5	1,43
PL36-8M-85	90,30	98,5	4F	1615	42		95	38	28,5	1,87
PL38-8M-85	95,39	103,0	4F	1615	42		95	38	28,5	2,20
PL40-8M-85	100,49	106,0	4F	2012	50		95	32	31,5	1,80
PL44-8M-85	110,67	119,0	4F	2012	50		95	32	31,5	2,30
PL48-8M-85	120,86	127,0	4F	2517	60		95	45	25	2,66
PL56-8M-85	141,23	148,0	4F	2517	60		95	45	25	4,45
PL64-8M-85	161,60	168,0	4F	2517	60		95	45	25	6,20
PL72-8M-85	181,97	192,0	4F	3020	75		95	51	22	8,00
PL80-8M-85	202,35		4	3020	75		95	51	22	10,00
PL90-8M-85	227,81		9W	3020	75	170	95	51	22	10,80
PL112-8M-85	283,83		9W	3020	75	170	95	51	22	15,00
PL144-8M-85	365,32		9A	3525	90	190	95	65	15	20,00
PL168-8M-85	426,44		9A	3525	90	190	95	65	15	23,00
PL192-8M-85	487,55		9A	3525	90	190	95	65	15	28,50