


Řemenice - HTD 14M

Standardní program PL

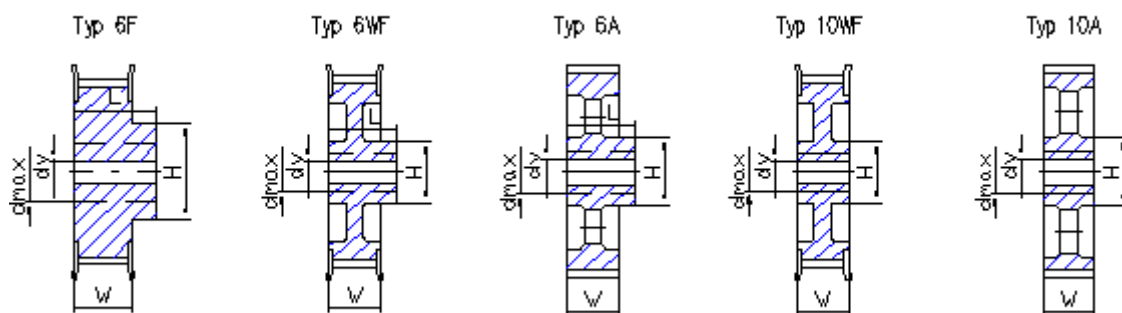

Počet zubů - označení	Hlavový průměr ozubení	Vnější průměr čel	Prove- dení	H	W	L	Předvrtání dv	Max. konečný otvor d	Hmotnost kg
--------------------------	------------------------------	----------------------	----------------	---	---	---	------------------	----------------------------	----------------

HTD 14M-40 pro řemeny šířky 40 mm. Materiál: šedá litina.

PL28-14M-40	122,12	127,0	4F	2012	50		54	32	11	2,07
PL29-14M-40	126,57	138,0	4F	2012	50		54	32	11	2,38
PL30-14M-40	130,99	138,0	4F	2012	50		54	32	11	2,65
PL32-14M-40	139,88	154,0	4F	2012	50		54	32	11	3,40
PL34-14M-40	148,79	160,0	4F	2517	60		54	45	4,5	3,87
PL36-14M-40	157,68	168,0	4F	2517	60		54	45	4,5	4,80
PL38-14M-40	166,60	183,0	4F	2517	60		54	45	4,5	5,40
PL40-14M-40	175,49	188,0	4F	2517	60		54	45	4,5	6,00
PL44-14M-40	193,28	211,0	4F	3020	75		54	51	1,5	7,80
PL48-14M-40	211,11	226,0	4F	3020	75		54	51	1,5	9,40
PL56-14M-40	246,76	256,0	9WF	3020	75	170	54	51	1,5	10,80
PL64-14M-40	282,41	296,0	9WF	3020	75	170	54	51	1,5	13,40
PL72-14M-40	318,06		9W	3020	75	170	54	51	1,5	15,20
PL80-14M-40	353,71		9A	3020	75	170	54	51	1,5	16,00
PL90-14M-40	398,28		9A	3020	75	170	54	51	1,5	17,80
PL112-14M-40	496,32		9A	3020	75	170	54	51	1,5	25,60
PL144-14M-40	638,92		9A	3020	75	170	54	51	1,5	32,00
PL168-14M-40	745,87		9A	3020	75	170	54	51	1,5	44,00
PL192-14M-40	852,82		9A	3020	75	170	54	51	1,5	49,00
PL216-14M-40	959,76		9A	3020	75	170	54	51	1,5	55,00

HTD 14M-55 pro řemeny šířky 55 mm. Materiál: šedá litina.

PL 28-14M-55	122,12	127	4F	2012	50		70	32	19	2,20
PL 29-14M-55	126,57	138	4F	2012	50		70	32	19	2,74
PL 30-14M-55	130,99	138	4F	2517	60		70	45	12,5	2,70
PL 32-14M-55	139,88	154	4F	2517	60		70	45	12,5	3,66
PL 34-14M-55	148,79	160	4F	2517	60		70	45	12,5	4,55
PL 36-14M-55	157,68	168	4F	2517	60		70	45	12,5	5,20
PL 38-14M-55	166,60	183	4F	2517	60		70	45	12,5	6,20
PL 40-14M-55	175,49	188	4F	2517	60		70	45	12,5	7,00
PL 44-14M-55	193,28	211	4F	3020	75		70	51	9,5	8,60
PL 48-14M-55	211,11	226	4F	3020	75		70	51	9,5	10,40
PL 56-14M-55	246,76	256	9WF	3020	75	170	70	51	9,5	12,00
PL 64-14M-55	282,41	296	9WF	3020	75	170	70	51	9,5	14,50
PL 72-14M-55	318,06		9W	3020	75	170	70	51	9,5	16,20
PL 80-14M-55	353,71		9A	3020	75	170	70	51	9,5	17,50
PL 90-14M-55	398,28		9A	3020	75	170	70	51	9,5	20,10
PL 112-14M-55	496,32		9A	3020	75	170	70	51	9,5	28,40
PL 144-14M-55	638,92		9A	3020	75	170	70	51	9,5	36,20
PL 168-14M-55	745,87		9A	3020	75	170	70	51	9,5	49,00
PL 192-14M-55	852,82		9A	3020	75	170	70	51	9,5	53,00
PL 216-14M-55	959,76		7A	3535	90	190	70	89	9,5	65,80

HTD 14M-85 pro řemeny šířky 85 mm. Materiál: šedá litina.

PL 28-14M-85	122,12	127	4F	2517	60		102	45	28,5	2,70
PL 29-14M-85	126,57	138	4F	2517	60		102	45	28,5	3,40
PL 30-14M-85	130,99	138	4F	2517	60		102	45	28,5	3,75
PL 32-14M-85	139,88	154	4F	2517	60		102	45	28,5	4,80
PL 34-14M-85	148,79	160	4F	2517	60		102	45	28,5	6,00
PL 36-14M-85	157,68	168	4F	3020	75		102	51	25,5	5,80
PL 38-14M-85	166,60	183	4F	3020	75		102	51	25,5	6,80
PL 40-14M-85	175,49	188	4F	3020	75		102	51	25,5	8,00
PL 44-14M-85	193,28	211	4F	3030	75		102	76	13,0	11,80
PL 48-14M-85	211,11	226	4F	3030	75		102	76	13,0	15,10
PL 56-14M-85	246,76	256	4F	3525	90	190	102	65	18,5	19,00
PL 64-14M-85	282,41	296	9WF	3525	90	190	102	65	18,5	23,00
PL 72-14M-85	318,06		9W	3525	90	190	102	65	18,5	25,00
PL 80-14M-85	353,71		9A	3525	90	190	102	65	18,5	26,00
PL 90-14M-85	398,28		9A	3525	90	190	102	65	18,5	27,80
PL 112-14M-85	496,32		9A	3525	90	190	102	65	18,5	36,50
PL 144-14M-85	638,92		9A	3525	90	190	102	65	18,5	48,00
PL 168-14M-85	745,87		9A	3525	90	190	102	65	18,5	60,00
PL 192-14M-85	852,82		3A	4040	100	230	102	102		86,00
PL 216-14M-85	959,76		3A	4040	100	230	102	102		91,50

HTD 14M-115 pro řemeny šířky 115 mm. Materiál: šedá litina.

PL 28-14M-115	122,12	127	4F	2517	60		133	45	44	3,77
PL 29-14M-115	126,57	138	4F	2517	60		133	45	44	4,00
PL 30-14M-115	130,99	138	4F	2517	60		133	45	44	5,00
PL 32-14M-115	139,88	154	4F	2517	60		133	45	44	6,80
PL 34-14M-115	148,79	160	4F	2517	60		133	45	44	6,80
PL 36-14M-115	157,68	168	4F	3020	75		133	51	41,0	7,00
PL 38-14M-115	166,60	183	4F	3020	75		133	51	41,0	8,40
PL 40-14M-115	175,49	188	4F	3020	75		133	51	41,0	9,20
PL 44-14M-115	193,28	211	4F	3030	75		133	76	28,5	14,00
PL 48-14M-115	211,11	226	4F	3030	75		133	76	28,5	17,10
PL 56-14M-115	246,76	256	4F	3535	90		133	89	22,0	24,80
PL 64-14M-115	282,41	296	9WF	3535	90	190	133	89	22,0	27,00
PL 72-14M-115	318,06		9W	3535	90	190	133	89	22,0	29,00
PL 80-14M-115	353,71		9A	3535	90	190	133	89	22,0	32,00
PL 90-14M-115	398,28		9A	3535	90	190	133	89	22,0	36,50
PL 112-14M-115	496,32		9A	3535	90	190	133	89	22,0	46,00
PL 144-14M-115	638,92		9A	4040	100	230	133	102	15,5	68,00
PL 168-14M-115	745,87		9A	4040	100	230	133	102	15,5	82,60
PL 192-14M-115	852,82		9A	4040	100	230	133	102	15,5	96,00
PL 216-14M-115	959,76		9A	4040	100	230	133	102	15,5	107,00

HTD 14M-170 pro řemeny šířky 170 mm. Materiál: šedá litina.

PL 38-14M-170	166,60	183	4F	3030	75		187	76	55,5	11,70
PL 40-14M-170	175,49	188	4F	3030	75		187	76	55,5	13,00
PL 44-14M-170	193,28	211	4F	3535	90		187	89	49,0	15,00
PL 48-14M-170	211,11	226	4F	3535	90		187	89	49,0	19,00
PL 56-14M-170	246,76	256	4F	3535	90		187	89	49,0	28,50
PL 64-14M-170	282,41	296	4F	4040	100		187	102	42,5	41,00
PL 72-14M-170	318,06		9W	4040	100	230	187	102	42,5	46,90
PL 80-14M-170	353,71		9W	4040	100	230	187	102	42,5	48,00
PL 90-14M-170	398,28		9A	4040	100	230	187	102	42,5	52,50
PL 112-14M-170	496,32		9A	5050	125	265	187	127	30,0	74,50
PL 144-14M-170	638,92		9A	5050	125	265	187	127	30,0	91,00
PL 168-14M-170	745,87		9A	5050	125	265	187	127	30,0	116,00
PL 192-14M-170	852,82		9A	5050	125	265	187	127	30,0	134,00
PL 216-14M-170	959,76		9A	5050	125	265	187	127	30,0	146,50